

# *Archival Digital Image Quality, Storage and Migration Strategies*


Sophie Triantaphillidou

**Imaging Technology Research Group**  
**University of Westminster**  
Watford Road, HA1 3TP, Middsex, UK  
<http://www.wmin.ac.uk/itrg>  
[triants@wmin.ac.uk](mailto:triants@wmin.ac.uk)


# *Introduction – Aims*

- Describe *the processes* involved in the digitisation of an image collection / archive.
- Provide guidelines on the quantification of *aspects of Image Quality* of the reproduction.
- Discuss digital image storage and migration strategies.

# *Steps Involved in Digitisation*

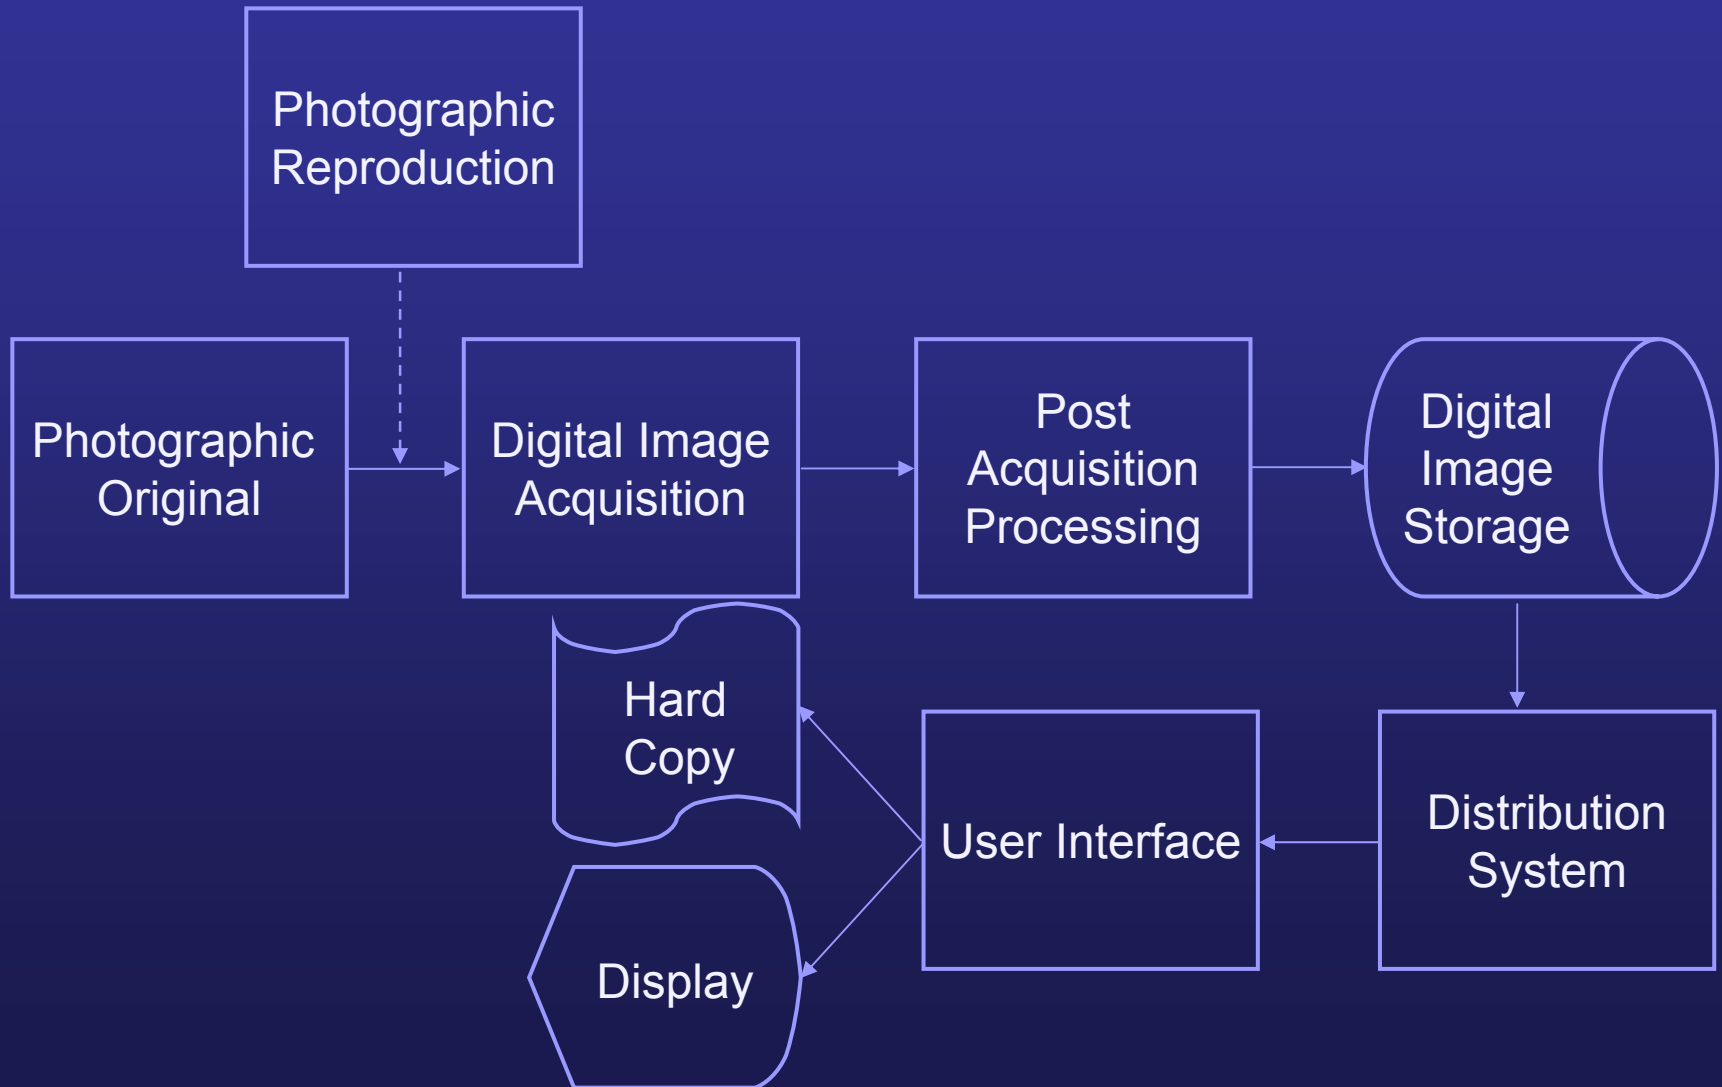

# *Steps Involved in Digitisation*

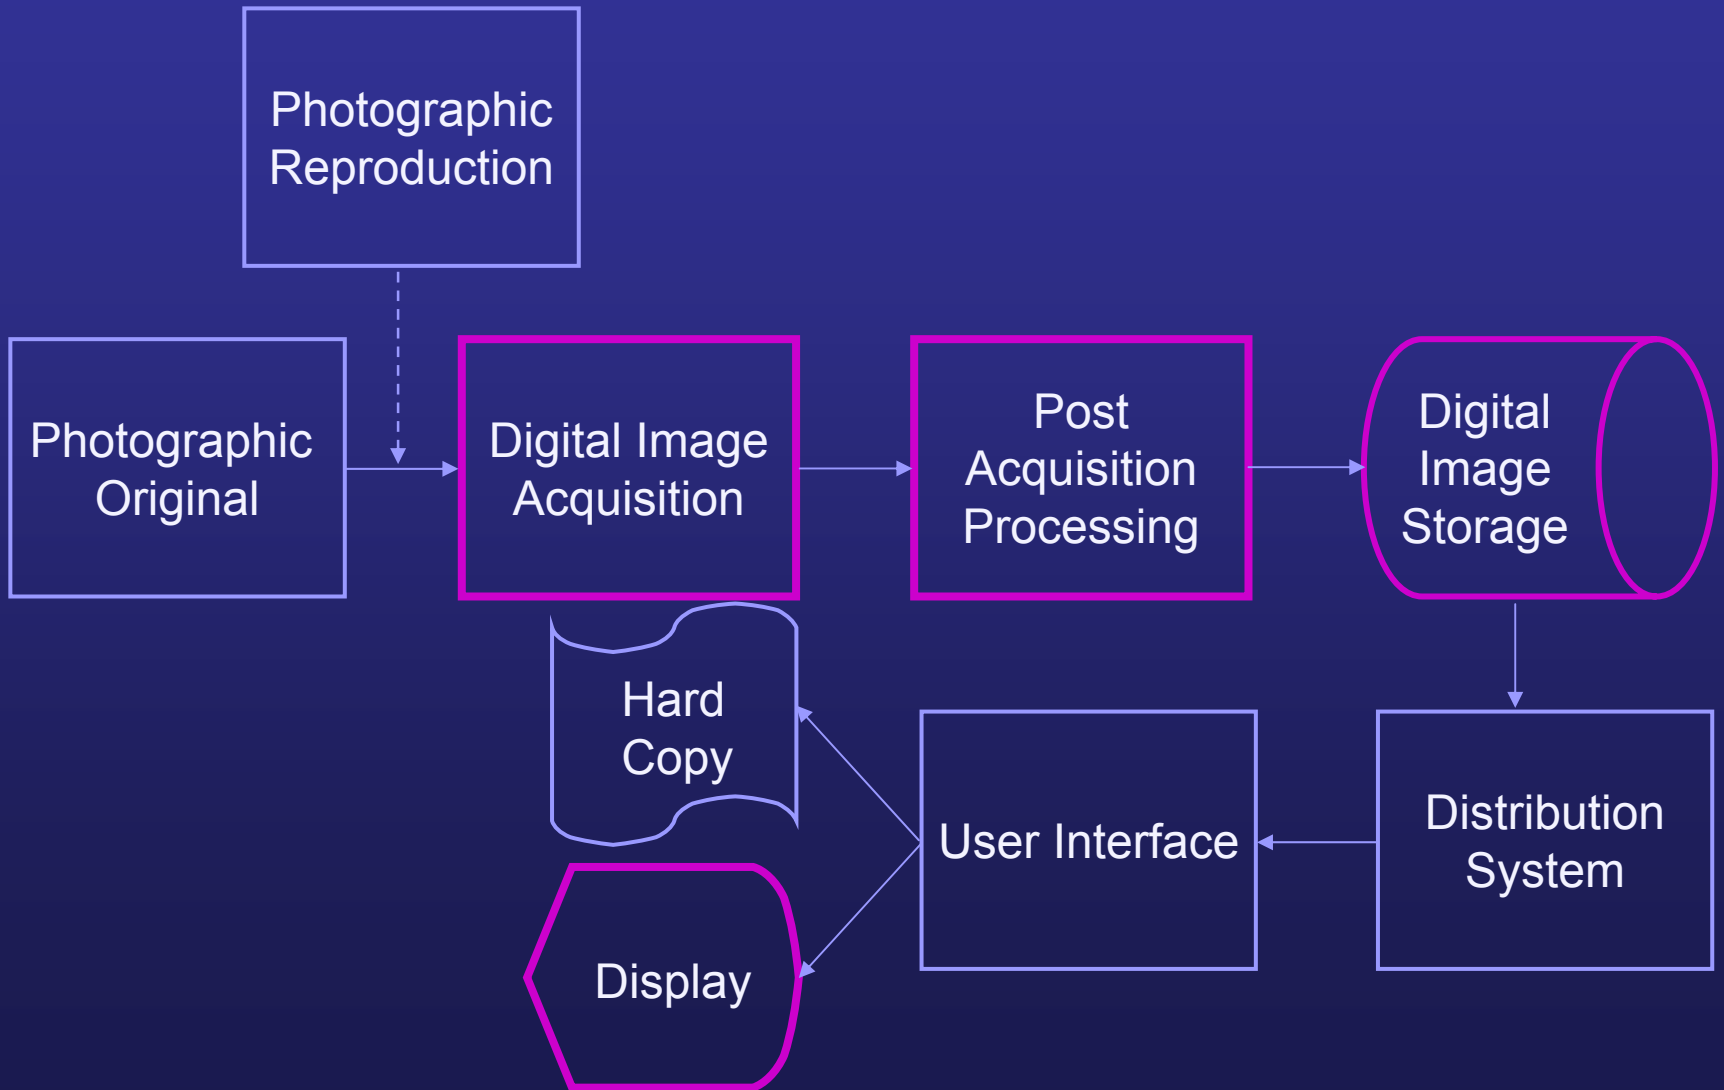

# Image Quality - Attributes

## Image Attribute

- *Tone*
- *Colour*
- *Resolution*
- *Sharpness*
- *Noise*
- *Digital Image Artefacts*

## Visual Description

- Macroscopic contrast or *intensity reproduction*.
- Differences in *lightness*, *chrominance* and *saturation*.
- Discrimination of *fine detail*.
- Microscopic contrast or reproduction of *edges*.
- Spurious information.
- Blocking, contouring, ringing.....


# *Digital Acquisition System*

## Attribute

## Parameters affecting the attribute


- *Tone*  
Dynamic range, bit depth, transfer function, contrast ( $\gamma$ ).
- *Colour*  
Illumination, spectral sensitivity, colour filters, spectral transmittance (optics), photographic dyes (original).
- *Sharpness/Resolution*  
Optics, sampling aperture, number of pixels, charge transfer efficiency, mechanical scan.
- *Noise*  
Photo & detector noise, non-uniformities, dead pixels.
- *Artefacts*  
Post-processing (ringing), compression (blocking, blurring), aliasing (sampling interval) contouring (bit-depth).

# Digital Acquisition - Characterisation

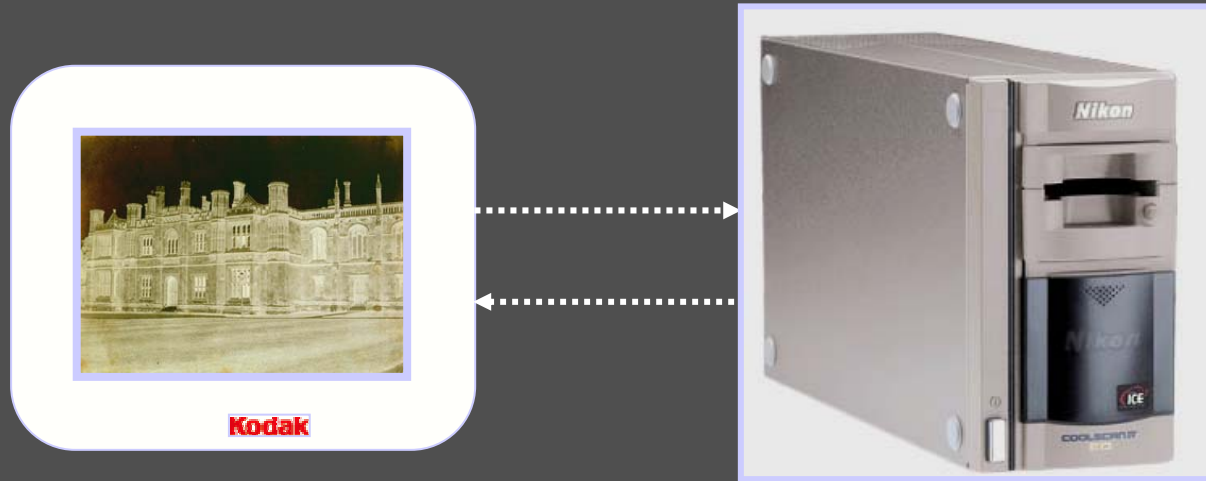

- *Tone reproduction* (Transfer function)
- *Resolution & sharpness* (Modulation transfer function - MTF)
- *Colour reproduction* (Relate scanner RGB with visual tri-stimulus values)


# Digital Acquisition - Tone

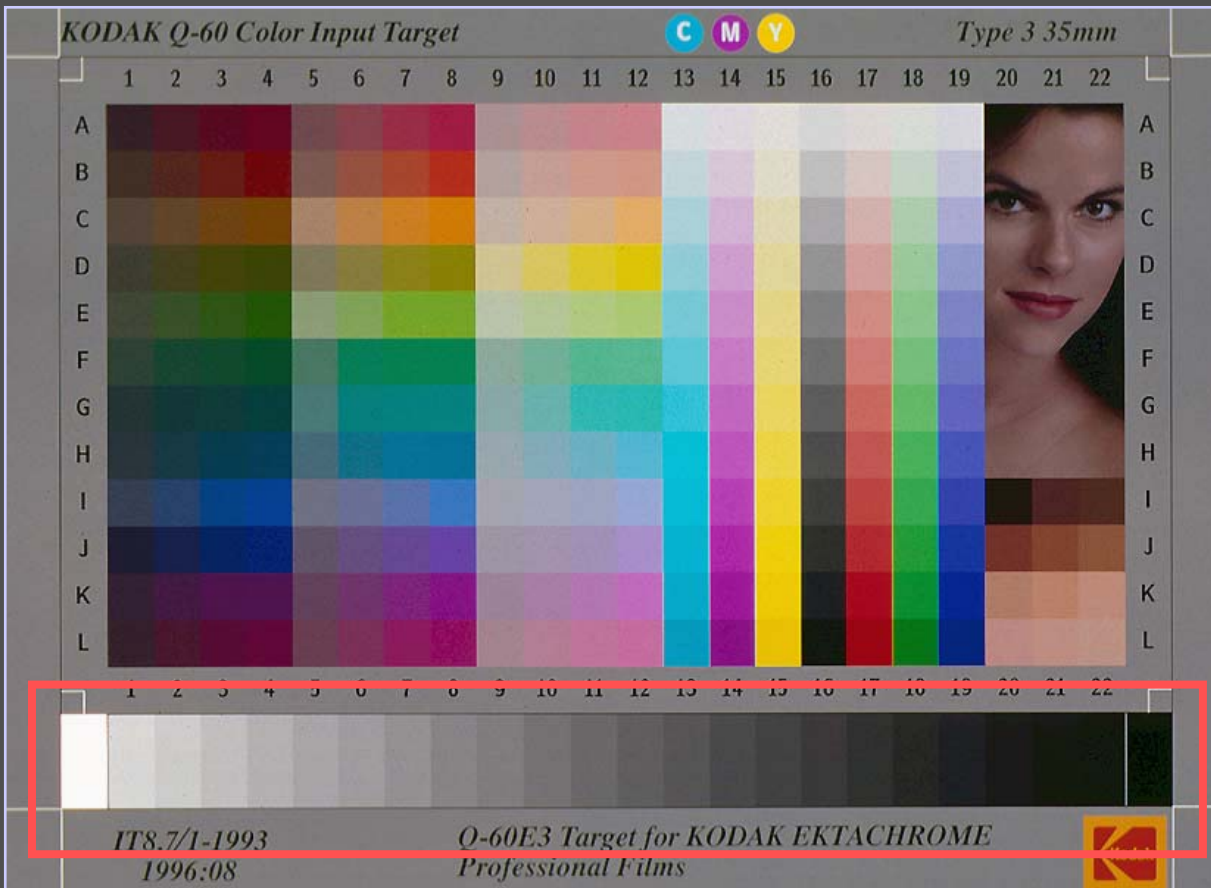

*Optoelectronic  
Conversion  
Function  
(OECF)*

ANSI IT8  
Standard target



# *Digital Acquisition - Tone*

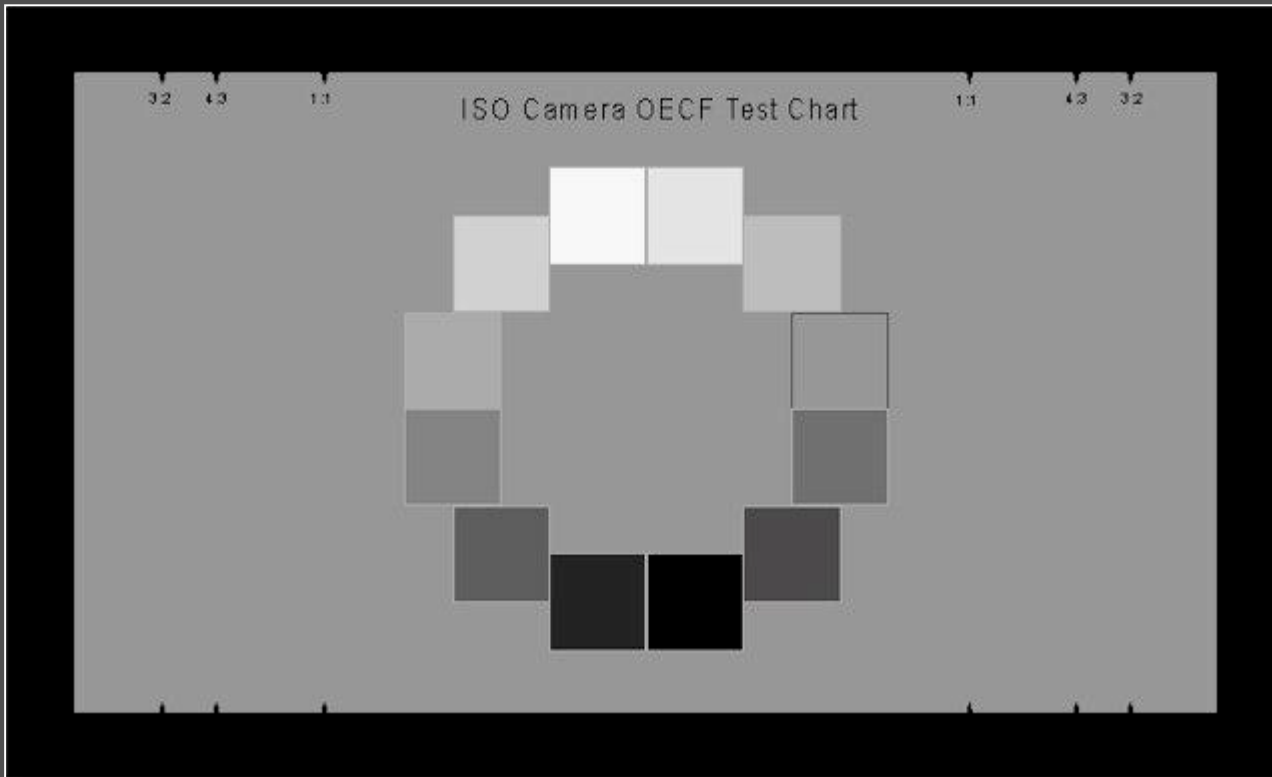


*Optoelectronic  
Conversion  
Function  
(OECF)*

ISO 14524  
Standard target

# Digital Acquisition - Tone

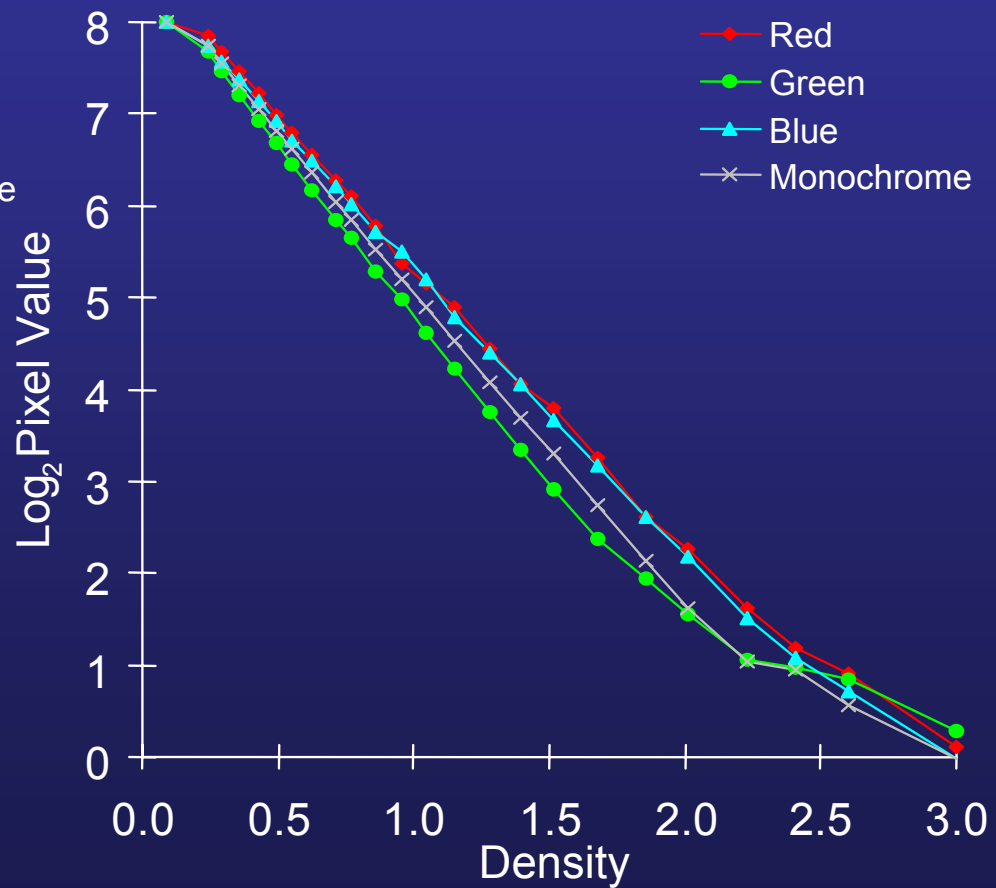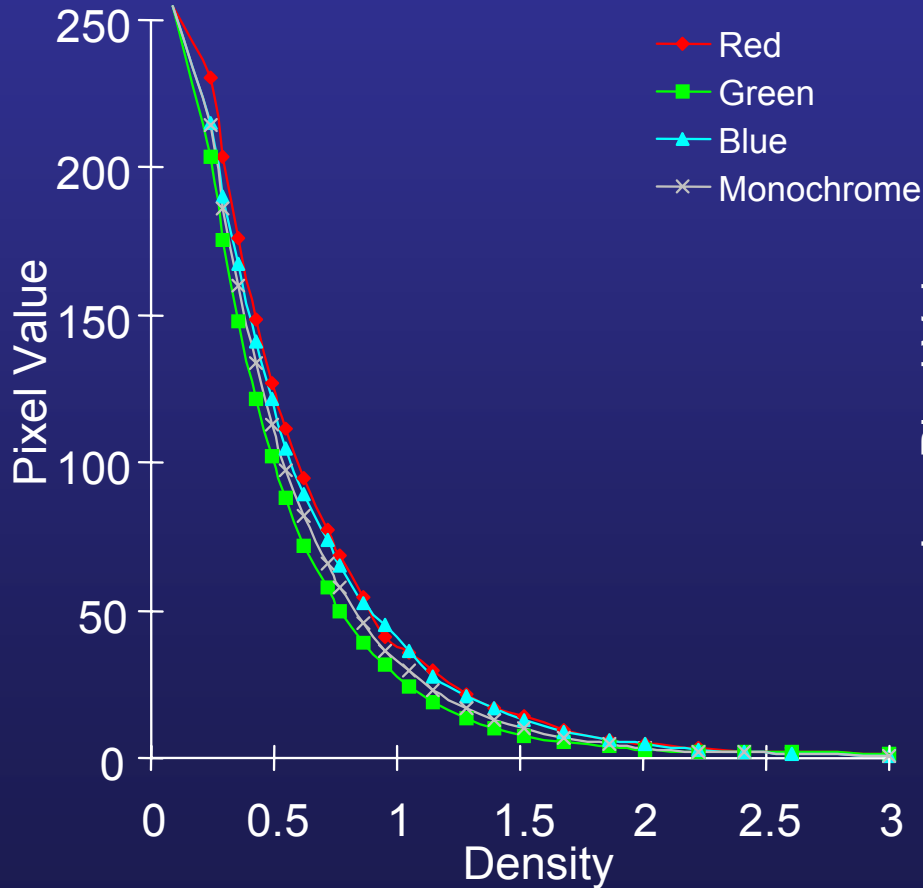


# Digital Acquisition - Tone

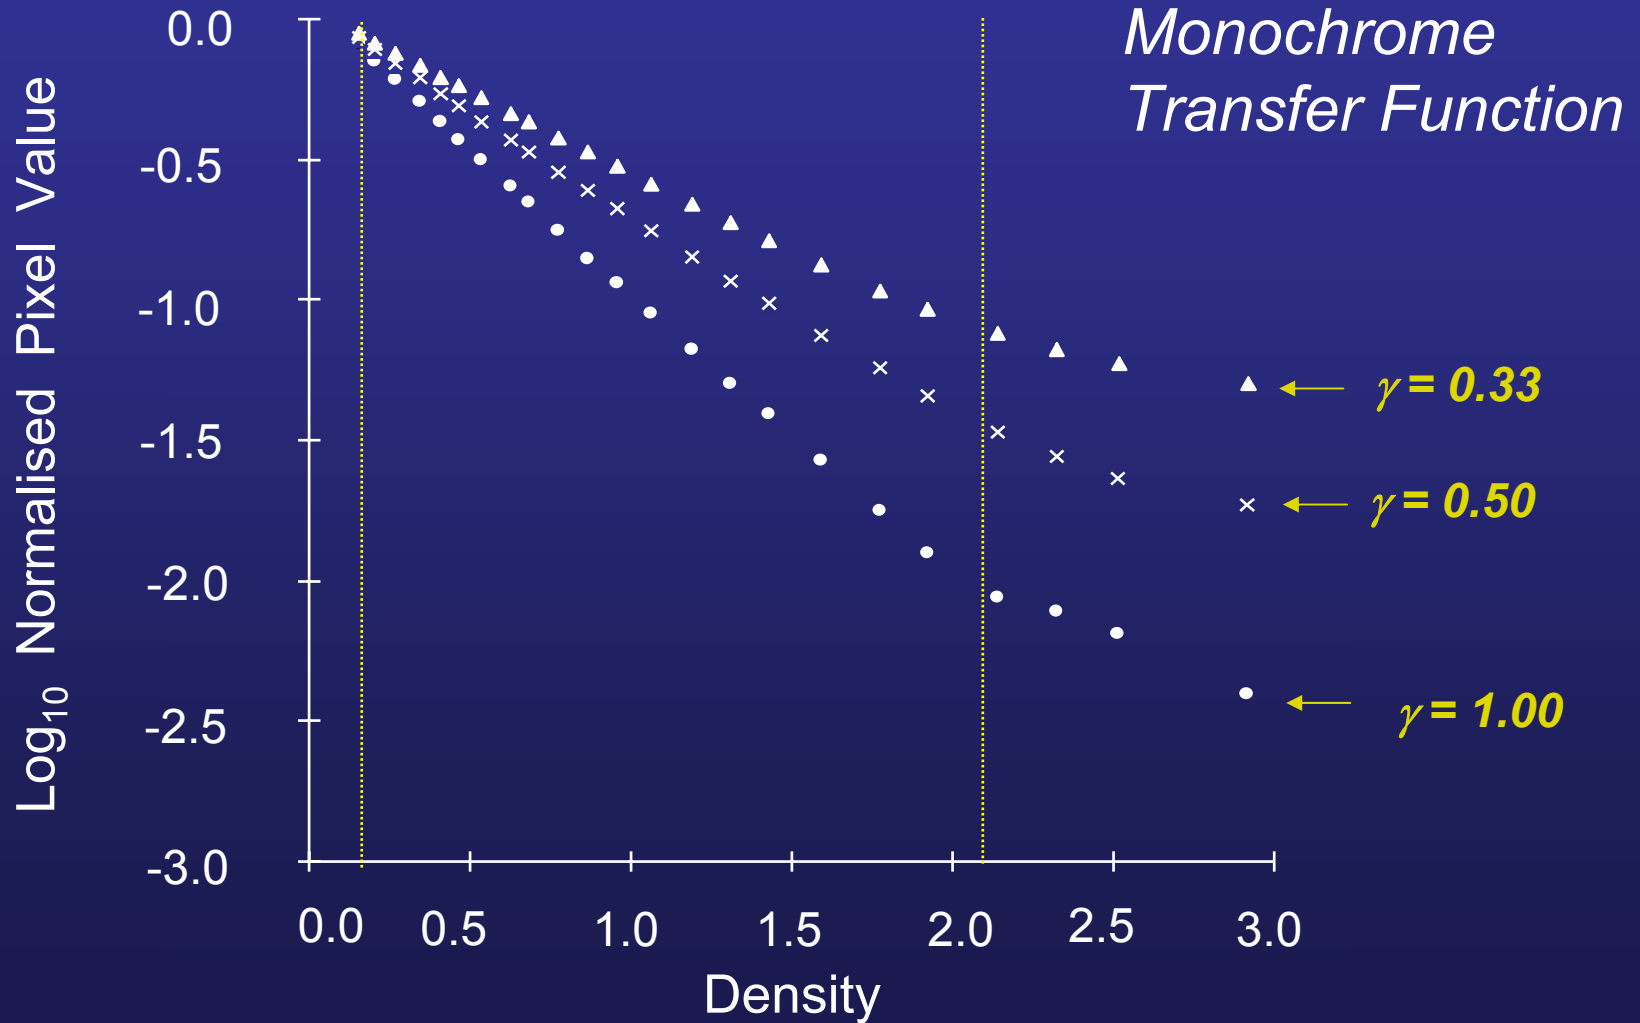

# *Digital Acquisition - Sharpness*

$$M(\omega) = M_d(\omega) M_o(\omega) M_{em}(\omega)$$

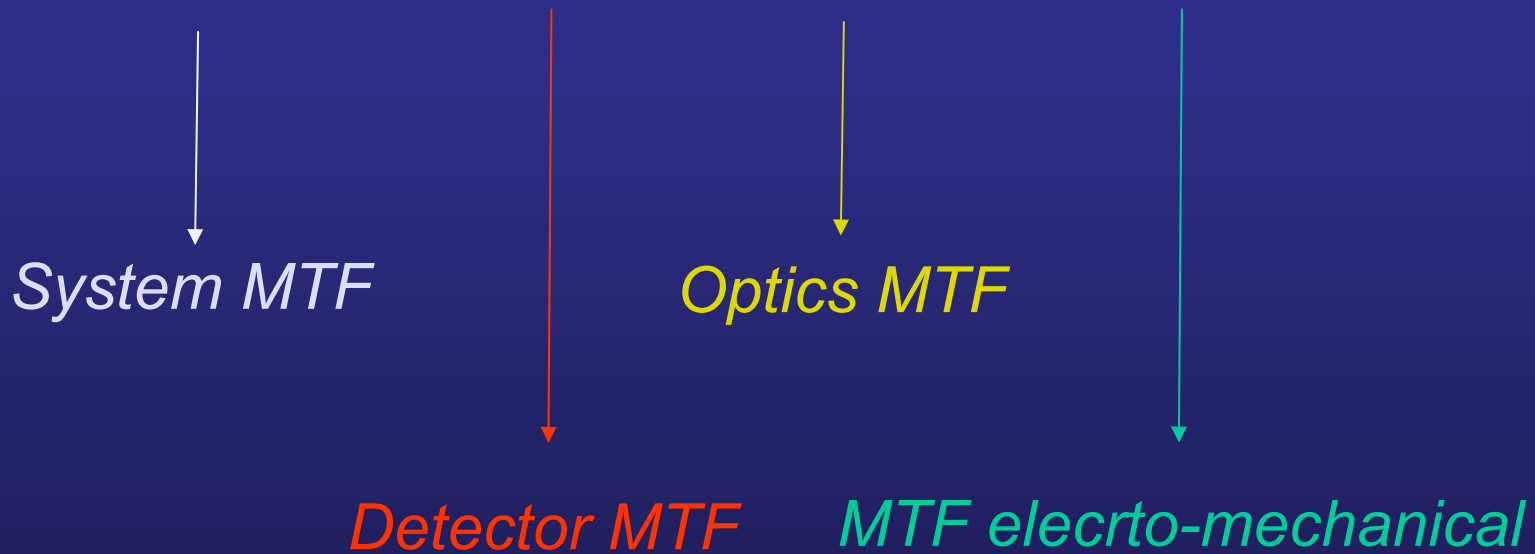


# *Digital Acquisition - Sharpness*




*ISO (12233, 16067-1, 16067-2)  
Slanted Edge SFR Method*

$$*SFR'(\omega) = SFR_{system}(\omega) M_{target}(\omega)*$$


# Digital Acquisition - Sharpness

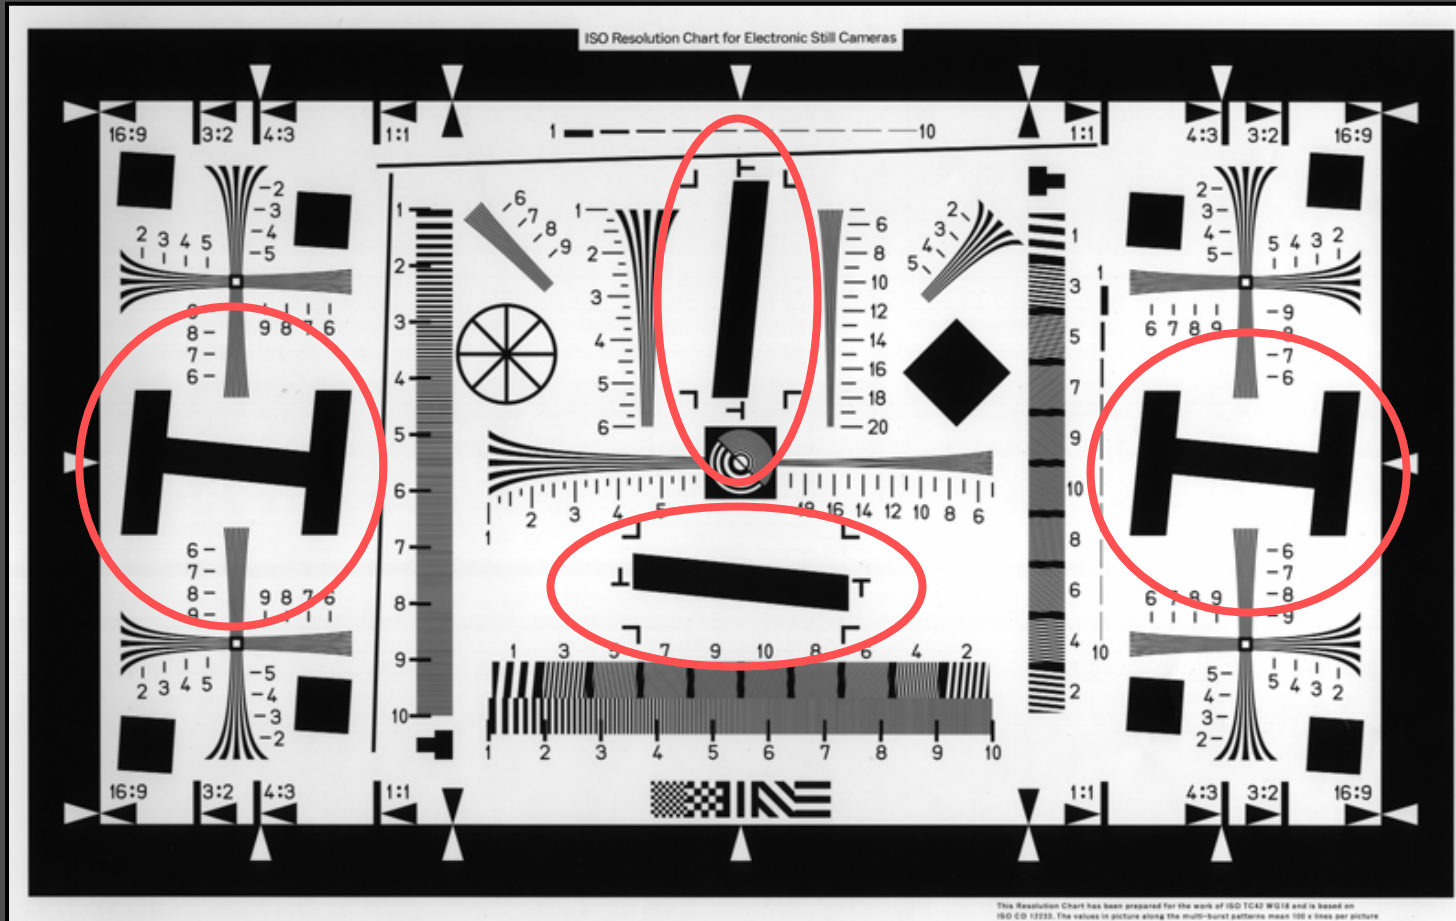

# Digital Acquisition - Sharpness

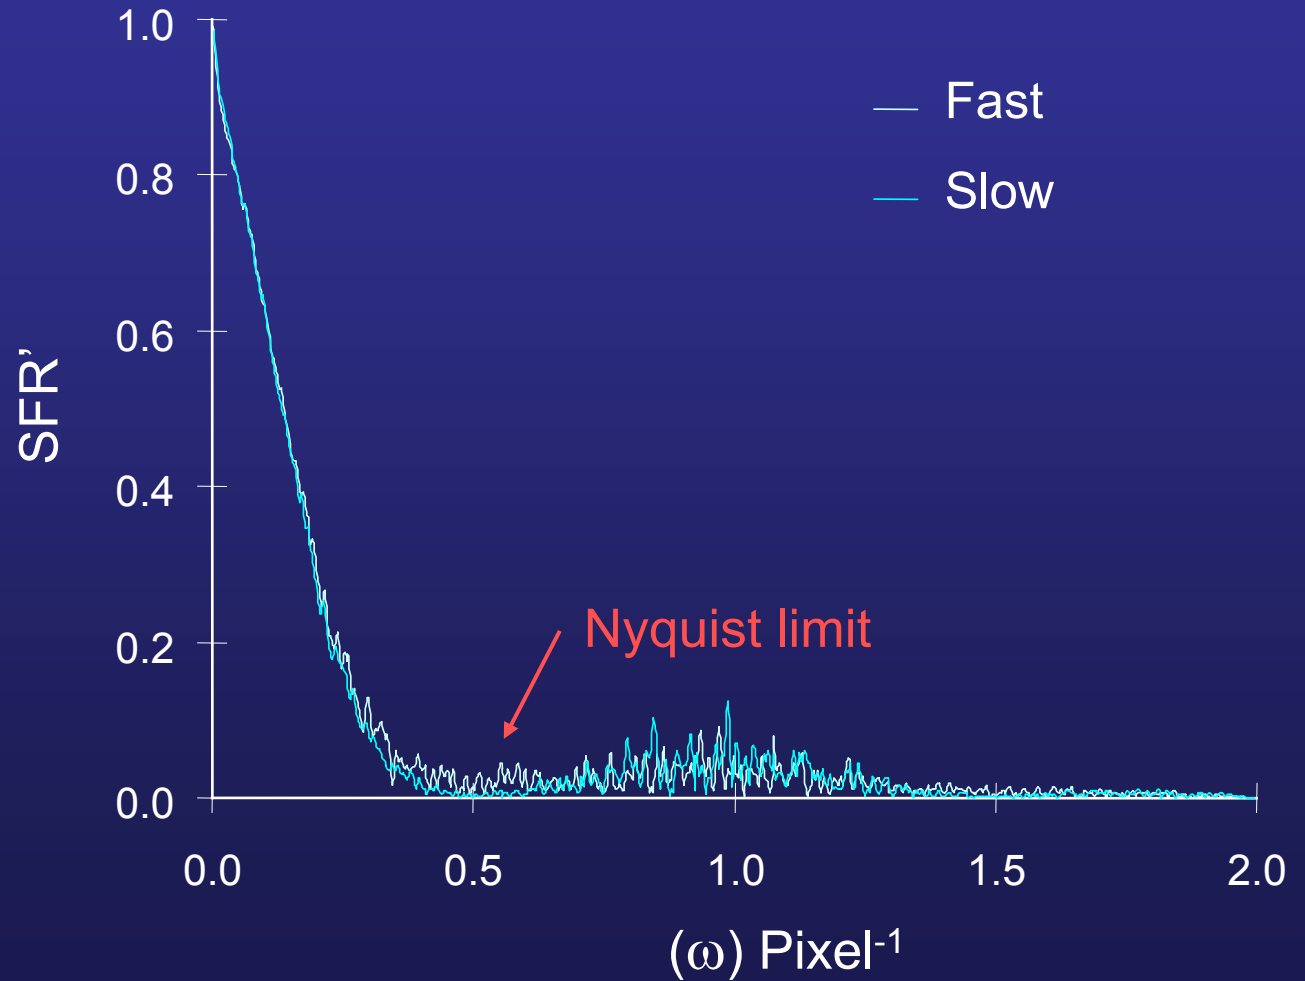

# Digital Acquisition - Sharpness

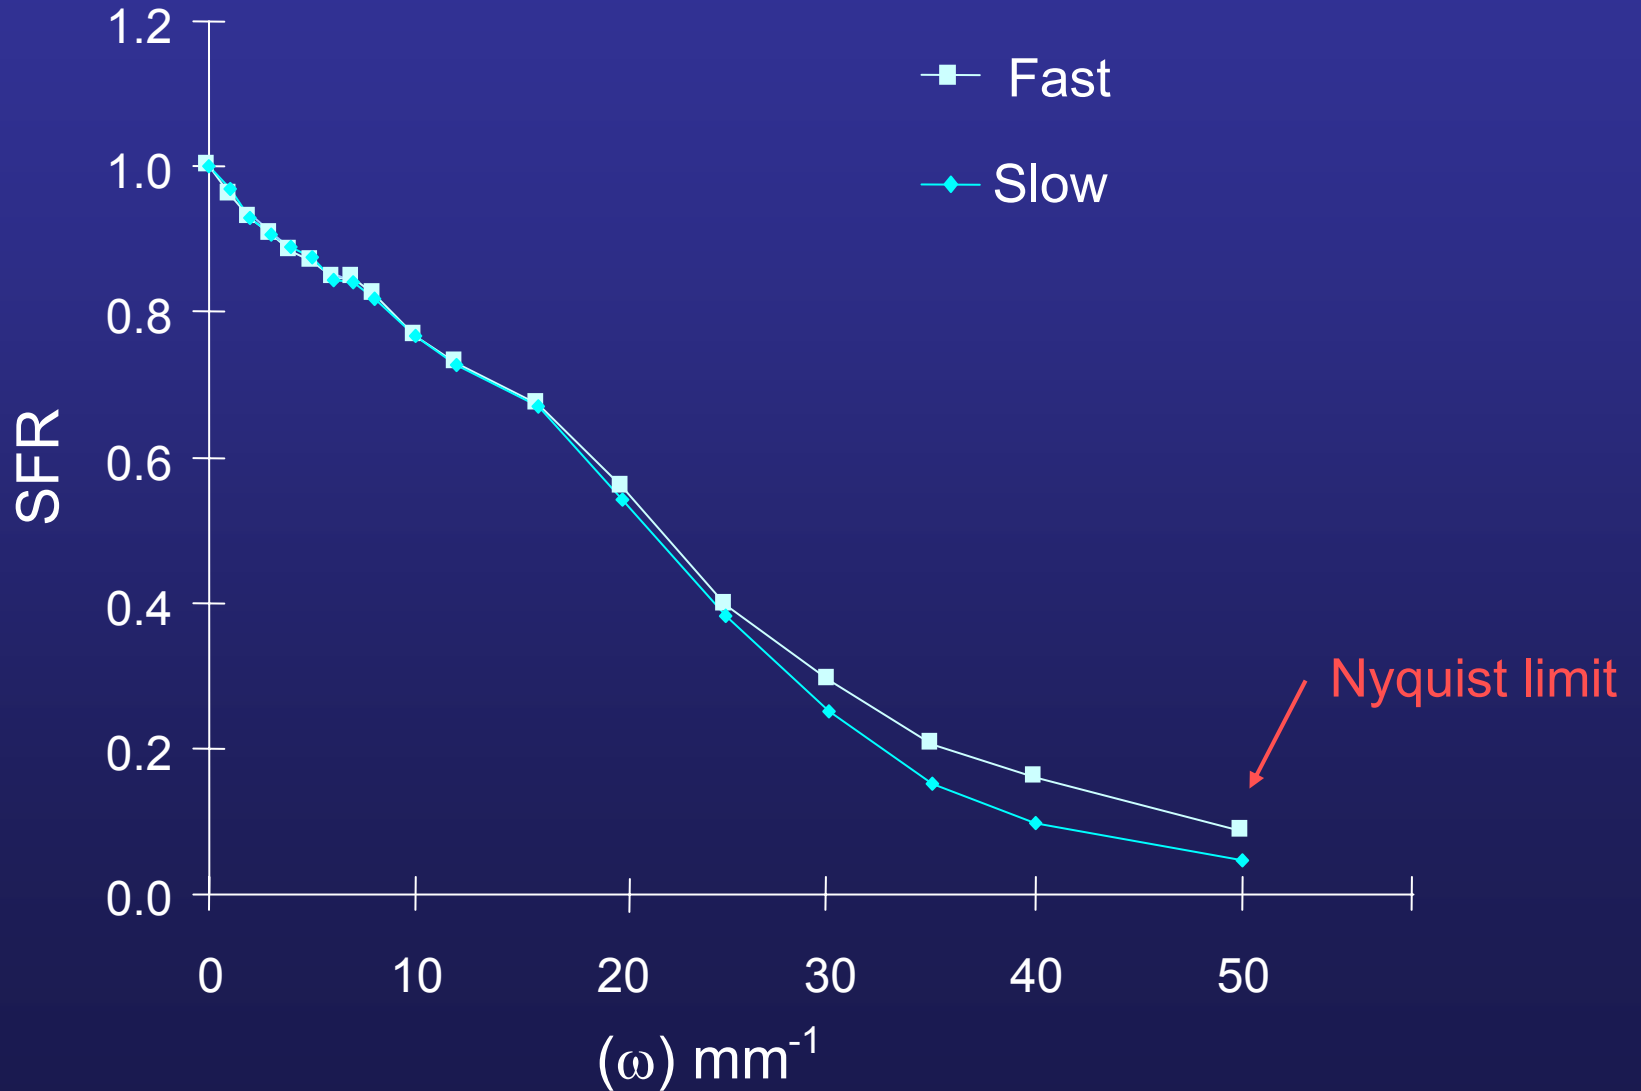

# *Digital Acquisition – Colour*

## *Polynomial Regression*

- Grey Balance: neutral colours  $R=G=B=f(Y)$
- Derivation of a  $3 \times m$  colour-correction matrix

# Digital Acquisition – Colour


$$\begin{pmatrix} X \\ Y \\ Z \end{pmatrix} = \begin{pmatrix} a_{X1} & a_{X2} & a_{X3} & a_{X4} & a_{X5} & a_{X6} \\ a_{Y1} & a_{Y2} & a_{Y3} & a_{Y4} & a_{Y5} & a_{Y6} \\ a_{Z1} & a_{Z2} & a_{Z3} & a_{Z4} & a_{Z5} & a_{Z6} \end{pmatrix} \begin{pmatrix} R \\ G \\ B \end{pmatrix}$$

R  
G  
B  
RG  
GB  
RB

# Digital Acquisition – Colour


$$\begin{pmatrix} X \\ Y \\ Z \end{pmatrix} = \begin{pmatrix} a_{X1} & a_{X2} & a_{X3} & a_{X4} & a_{X5} & a_{X6} \\ a_{Y1} & a_{Y2} & a_{Y3} & a_{Y4} & a_{Y5} & a_{Y6} \\ a_{Z1} & a_{Z2} & a_{Z3} & a_{Z4} & a_{Z5} & a_{Z6} \end{pmatrix} \begin{pmatrix} R \\ G \\ B \\ RG \\ GB \\ RB \end{pmatrix}$$

# Digital Acquisition – Colour

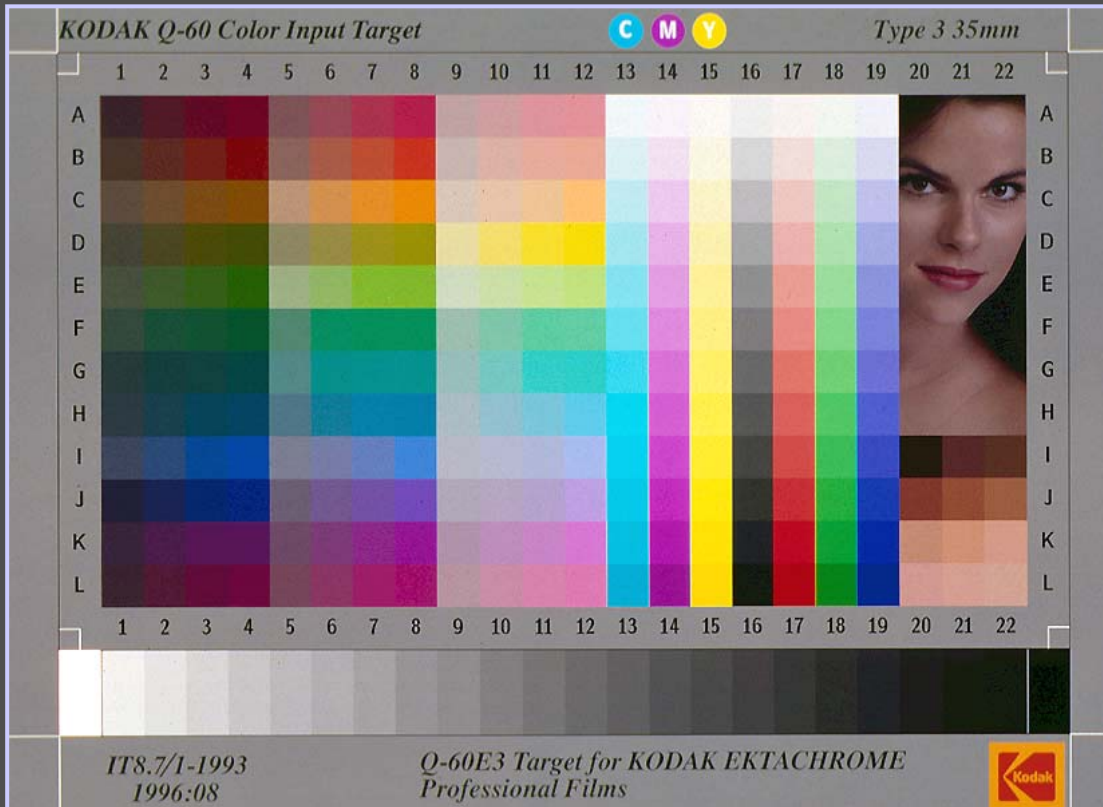


- ANSI IT8 on Kodak Ektachrome slide film.
- CIE  $D_{65}$
- CIE 1931  $2^\circ$

# Digital Acquisition – Colour

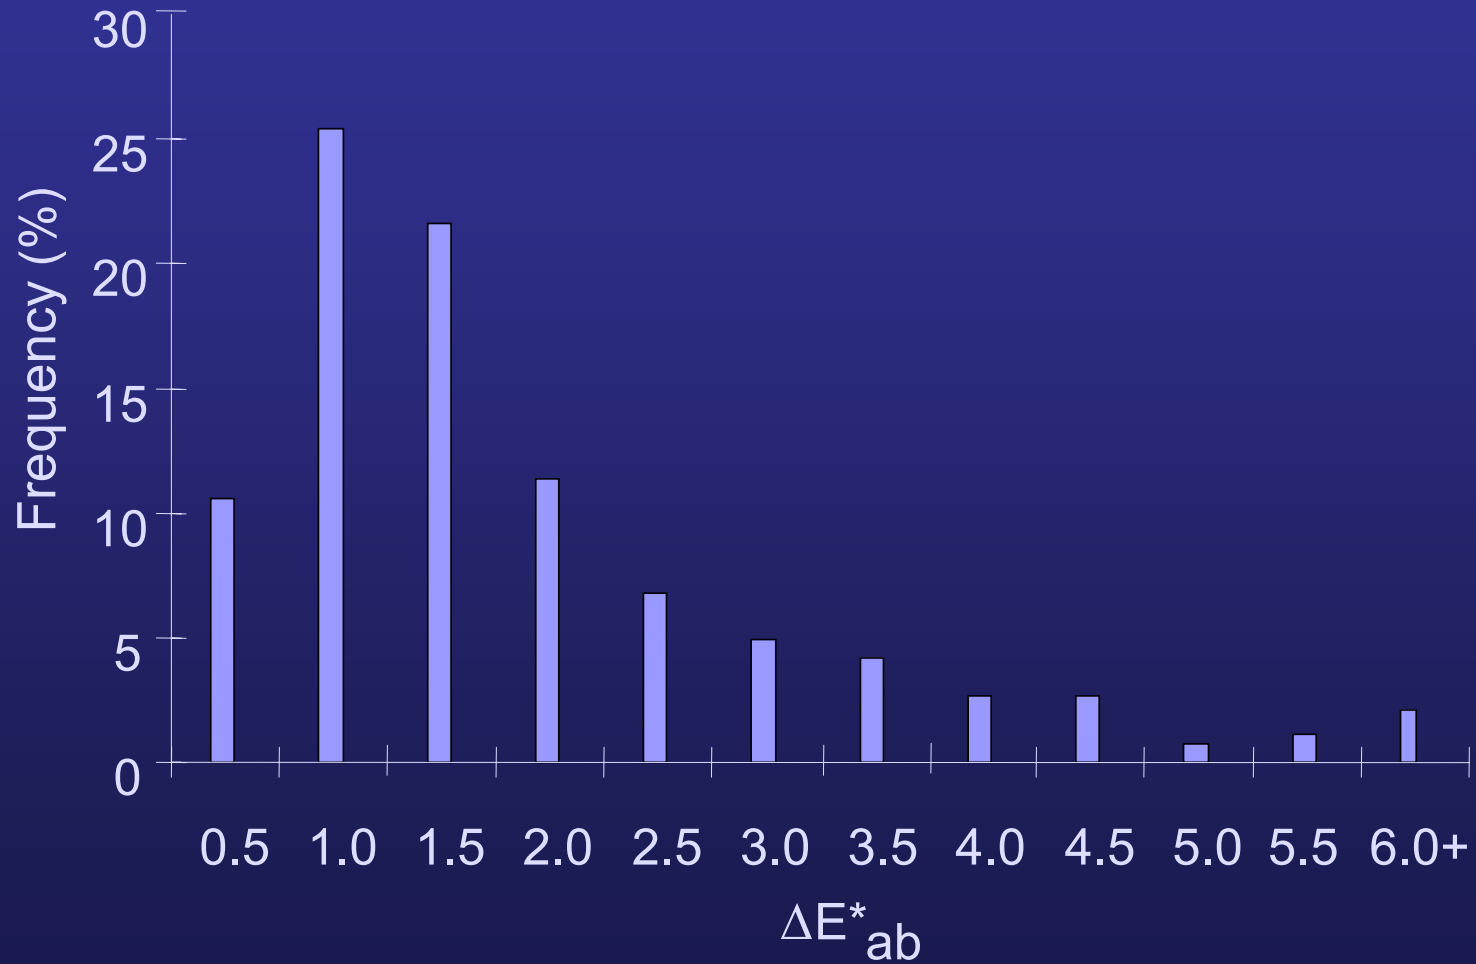


# Digital Acquisition – Colour

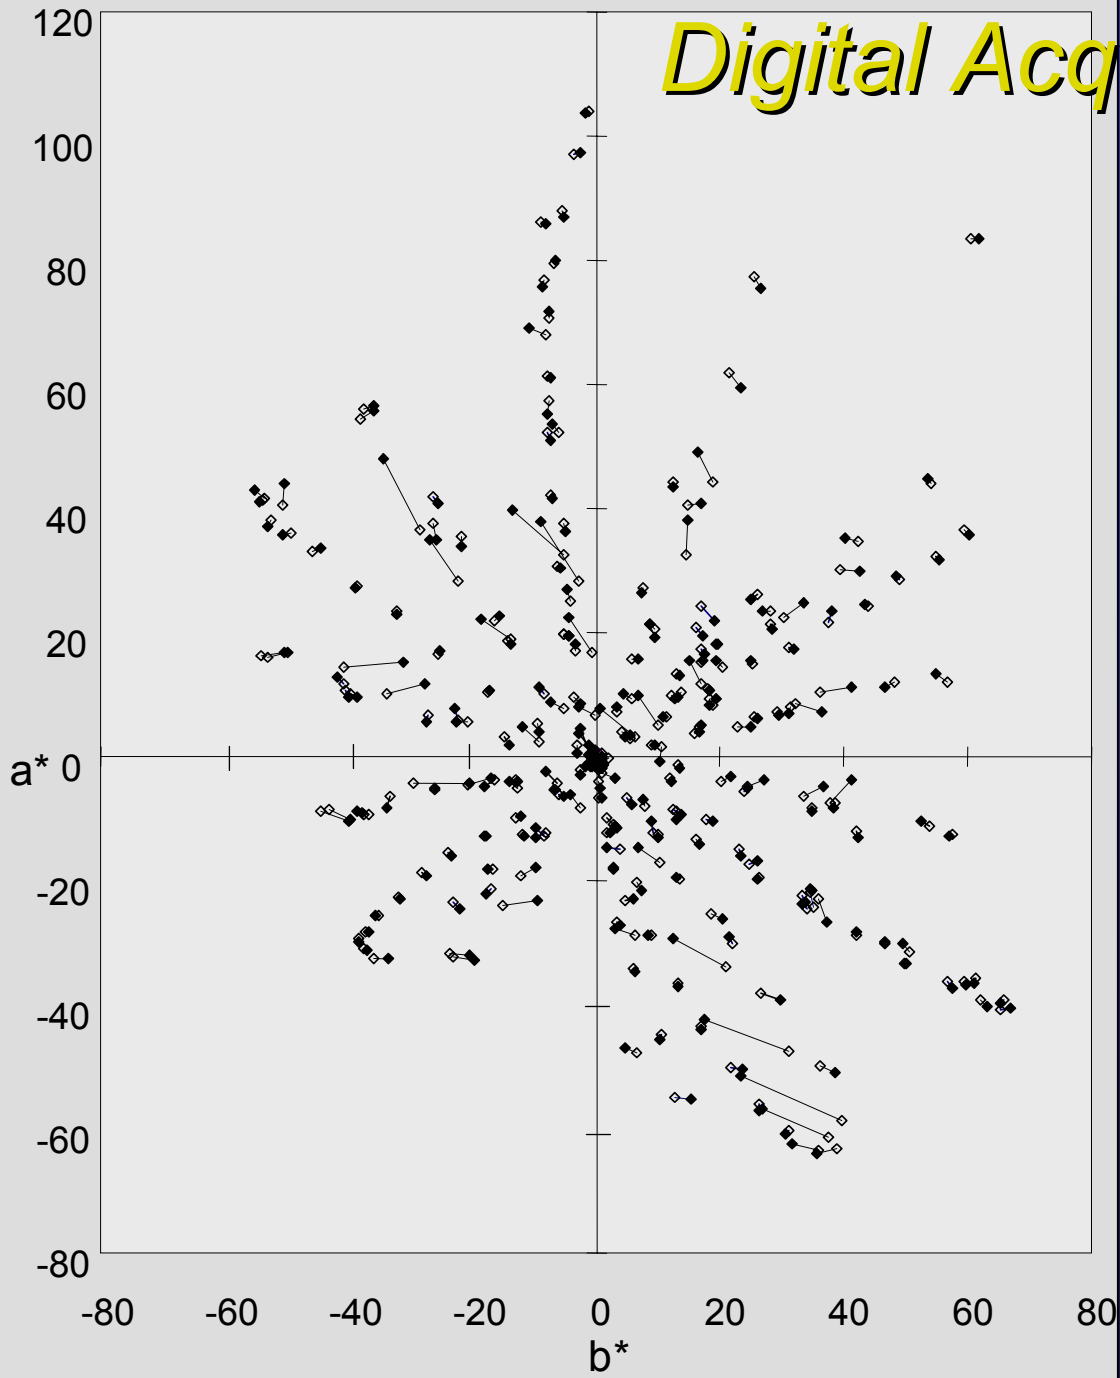

Larger mismatches:

- yellow-green
- violet
- outer regions

# Digital Acquisition – Colour

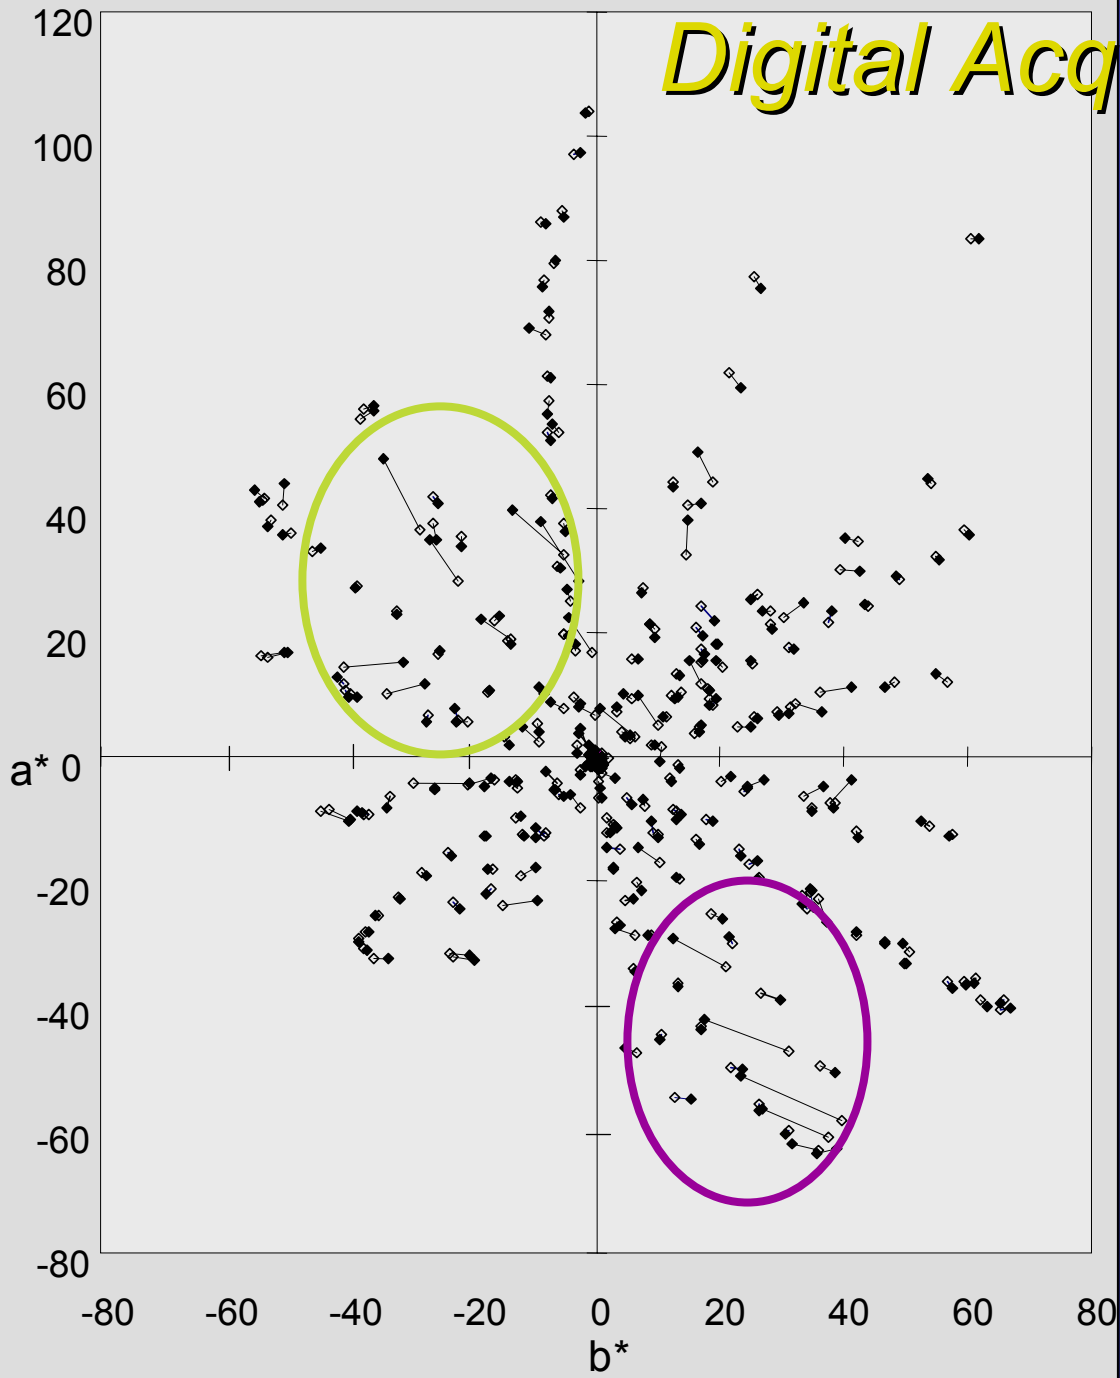

Larger mismatches:

- yellow-green
- violet
- outer regions

# Post Acquisition – Image Encoding



- *Convert from scanner tri-stimulus to an output colour space*
  - Such as sRGB colour space, Adobe RGB or other.
- *Assess output space (sRGB)* - Losses in the available range of colours.

# *Post Acquisition – Image Encoding*

**sRGB**

*Reference Display (CRT)*

- Luminance Level : 80 cd/m<sup>2</sup>
- White Point : CIE D<sub>65</sub>
- Model offset (R,G,B) : 0.055
- Model gamma (R,G,B) : 2.4

# *Post Acquisition – Image Encoding*

**sRGB**

*Reference Viewing Conditions*

- Ambient illuminance level : 64 lux
- Ambient white point : CIE  $D_{50}$
- Veiling glare : 1.0%
  
- Reference observer : CIE 1931 2°

# *Post Acquisition – Image Encoding*

**sRGB**



*Encoding (transformation)*

- Linear transformation from CIEXYZ to linear normalised display RGB.
- Application of a power function to compensate for the reference display transfer function.

# Post Acquisition – Image Encoding



Red - 5.0%

Green - 1.4%

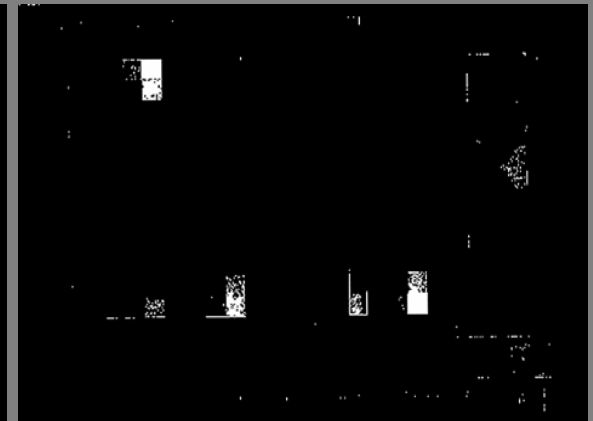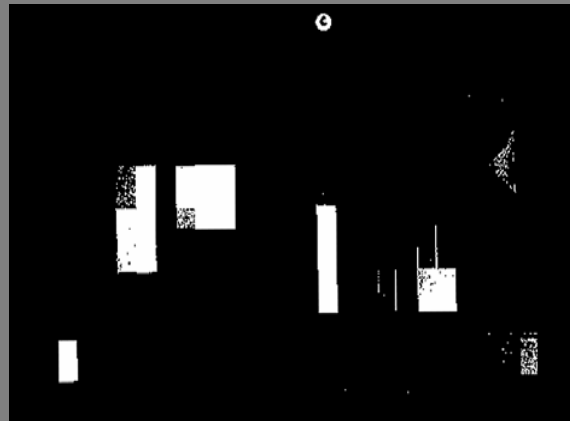


Blue - 2.5%


RGB

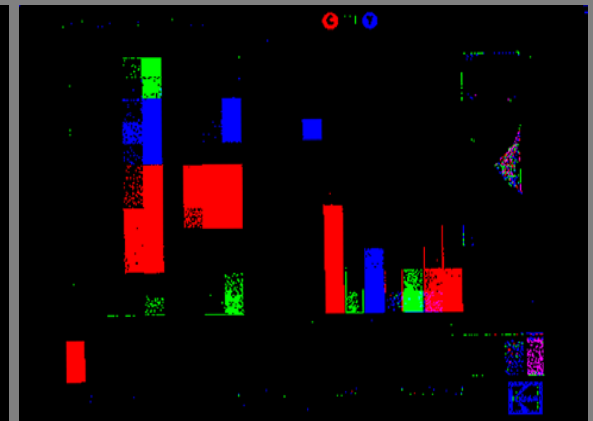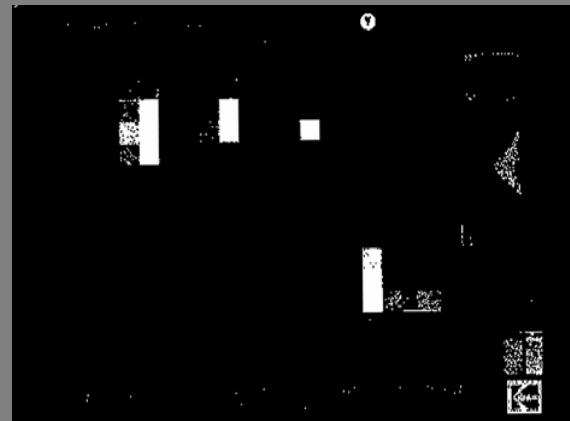



# Post Acquisition – Image Encoding

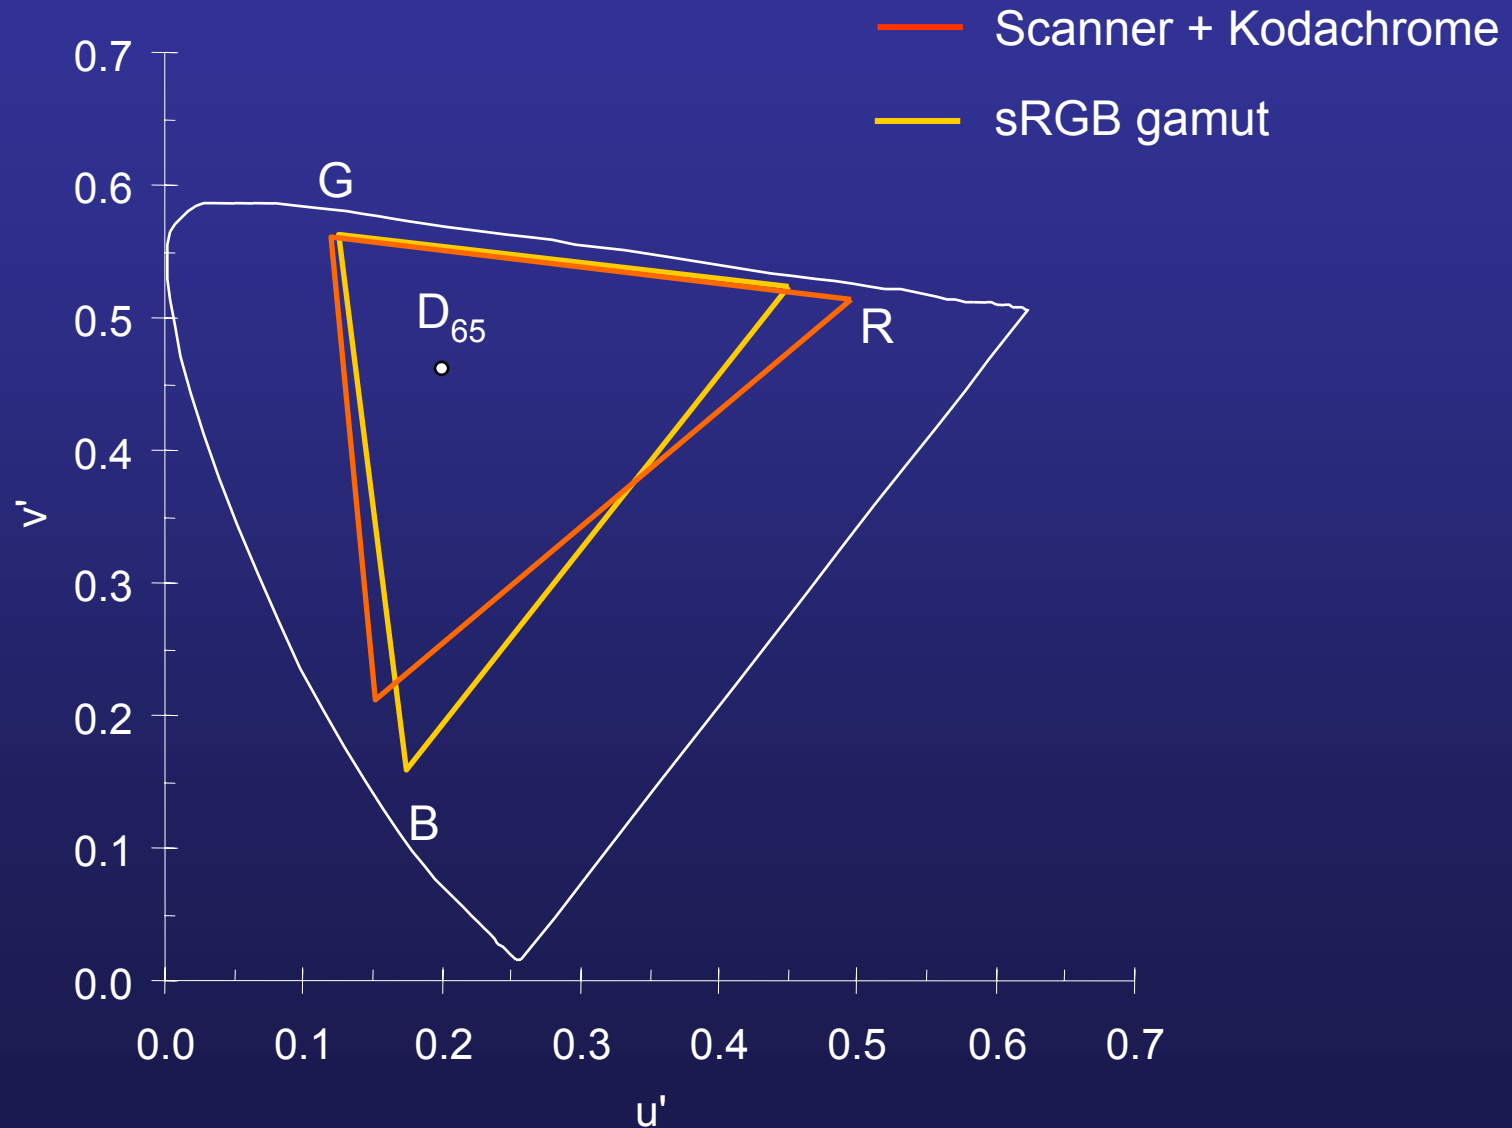

# Colour Management

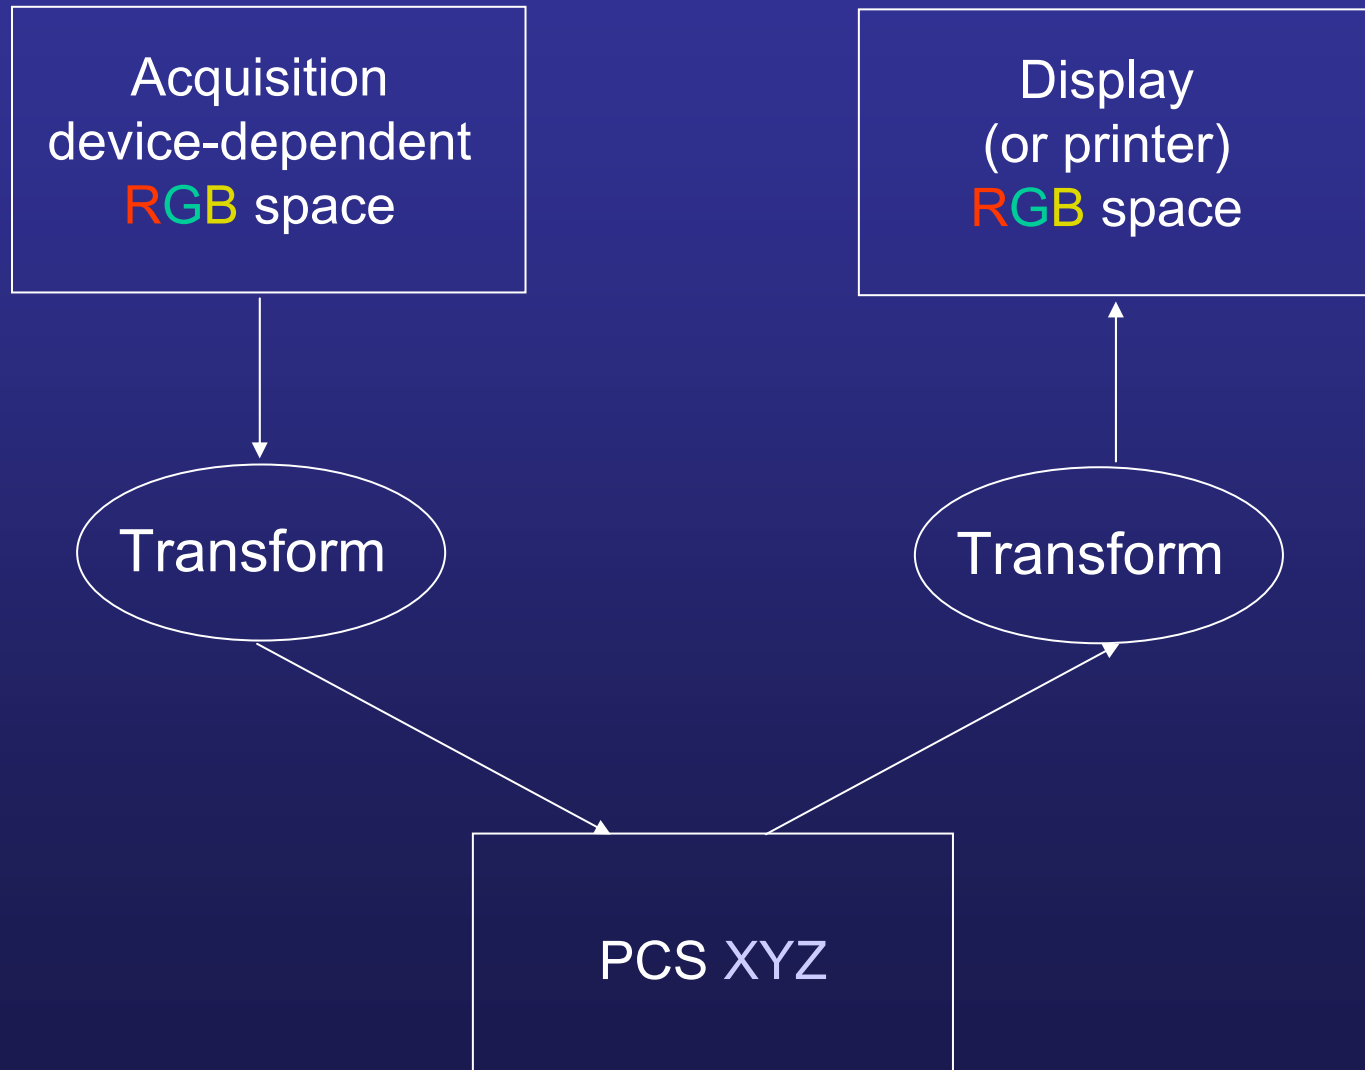


# Colour Management – Acquisition Profile

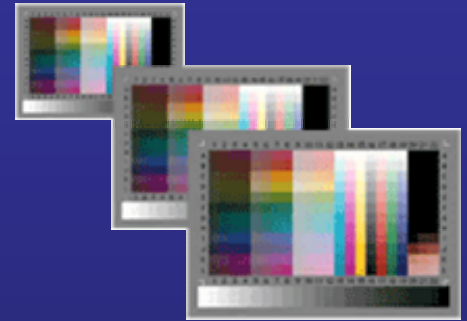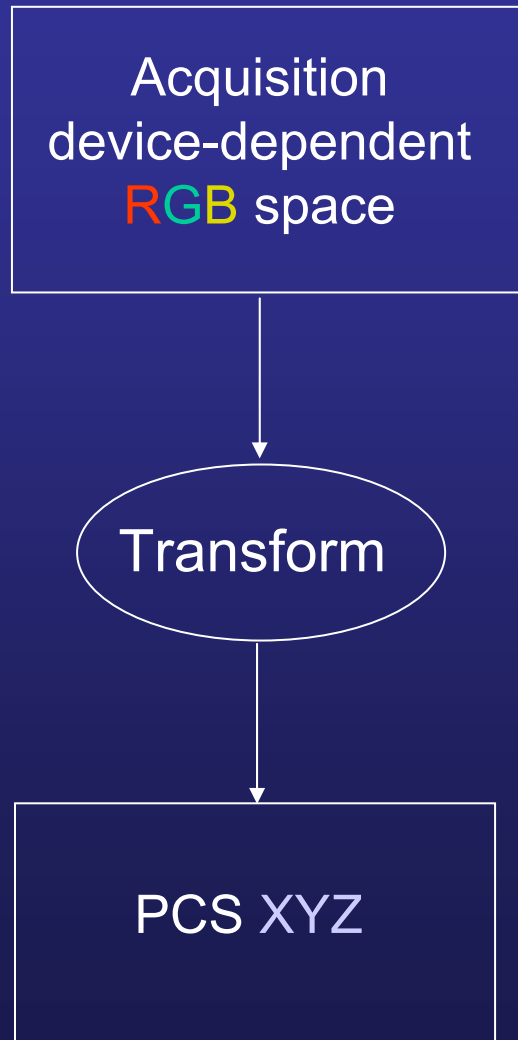

- Measuring tool (spectrophotometer)
- **Profile** maker software
- Acquisition device **profile** must be attached to the acquired images.

# Colour Management – Display Profile

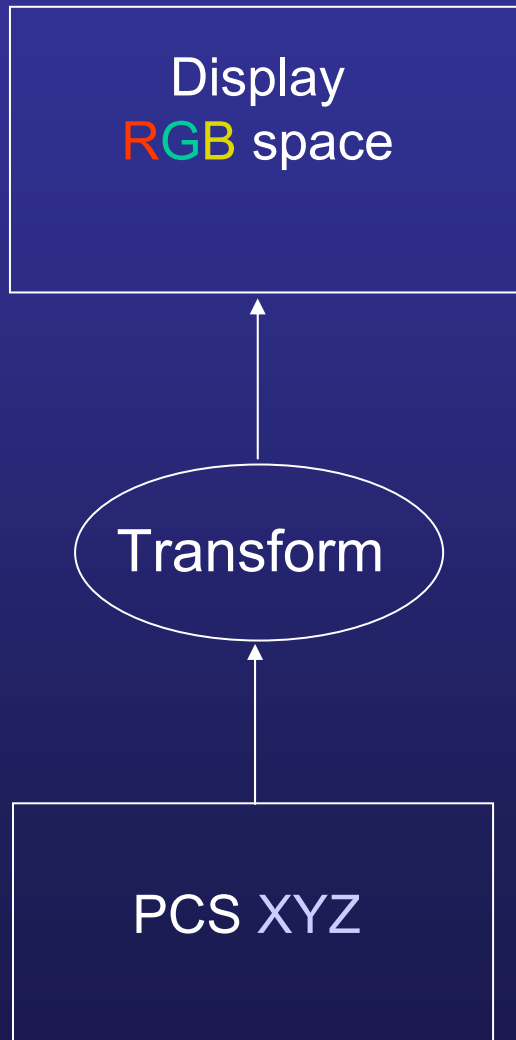


- Colorimeter.



- Software for display characterisation.
- Display colour *profile*.

# Colour Management

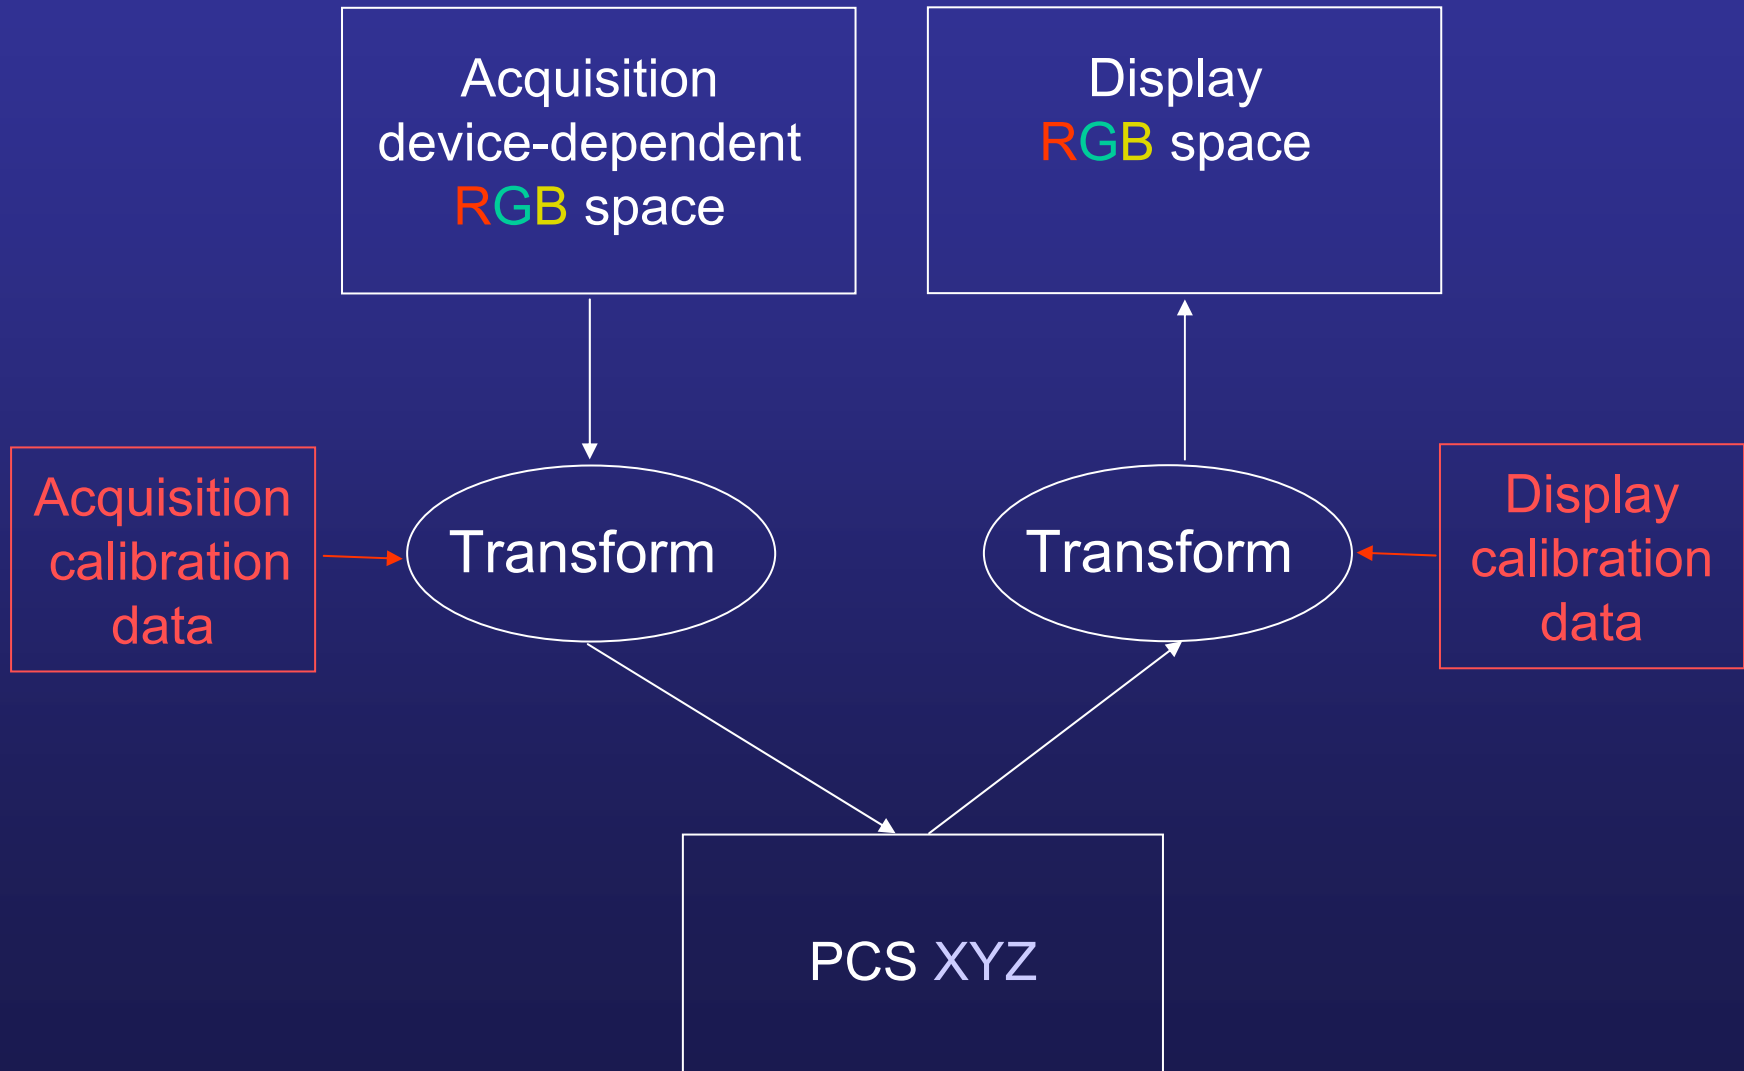

# Image Storage – File Format



## Tagged File Format (TIFF)

- Easy access and retrieval
- Thoroughly documented
- Source code available
- Fully supported by current H/S
- Expanded around a basic frame
- Most advisable for image archiving
- Colour profiles can be incorporated

# Image Storage – File Format



*JPEG 2000 (wavelet based compression scheme)*

- Allows for lossless compression
- Allows for ROI compression
- Image stored at different resolutions
- Not fully supported by H/S
- Lossy IQ not fully evaluated

# Image Storage – Medium



*Writable Compact Disks (CD-R),  
ISO 9660*

- Fast random access
- Medium data capacity (~700 MB)
- Long physical lifetime
- Removable media
- Easily duplicated
- Write-once (R not RW)
- Cheap
- Industry and ISO standard

# Image Storage – Medium



## *Digital Versatile Disk - DVD-ROM*

- Obvious successor or CD-ROM
- Same physical size (120mm)
- Increased data capacity, up to 4.7 GB
- ISO standard format

# *Data Migration*

*Transfer from obsolete to newer systems*

## *Hardware*

- Storage medium - CD-R, DVD
- Reader - CD-DVD Drive
- Computer system

## *Software*

- File Format
- Software driving the reader (driver)
- Operating system

# Summary

- The digital image acquisition – most important step.
- Characterisation of acquisition device – if possible – is essential.
- Image Metadata should *ideally* be stored/preserved with the digital images.
- Digital image data should be acquired at the optical resolution of the scanner and be saved/stored in the scanner RGB colour space.
- Images can be then converted to appropriate colour space for any output (display or print).

# Summary

- Colour management system:
  - acquisition device must be characterised / calibrated
  - input profile must be attached to digital image files
  - output device must be calibrated & profiled for specific viewing conditions.
  
- File format – TIFF
  
- Medium - CD-R (write once) – use ISO 9660 recording
  
- Migration of digital info is *essential*.